

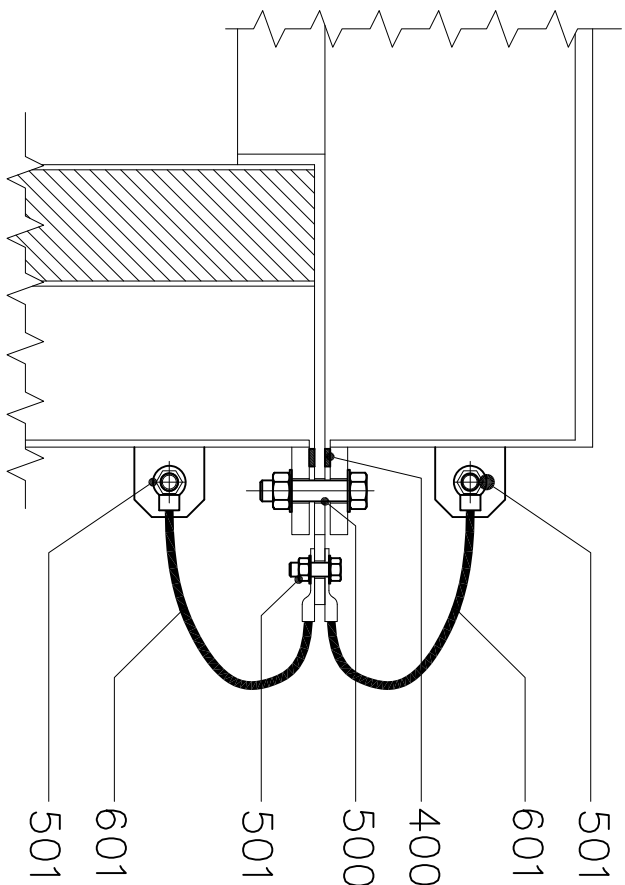


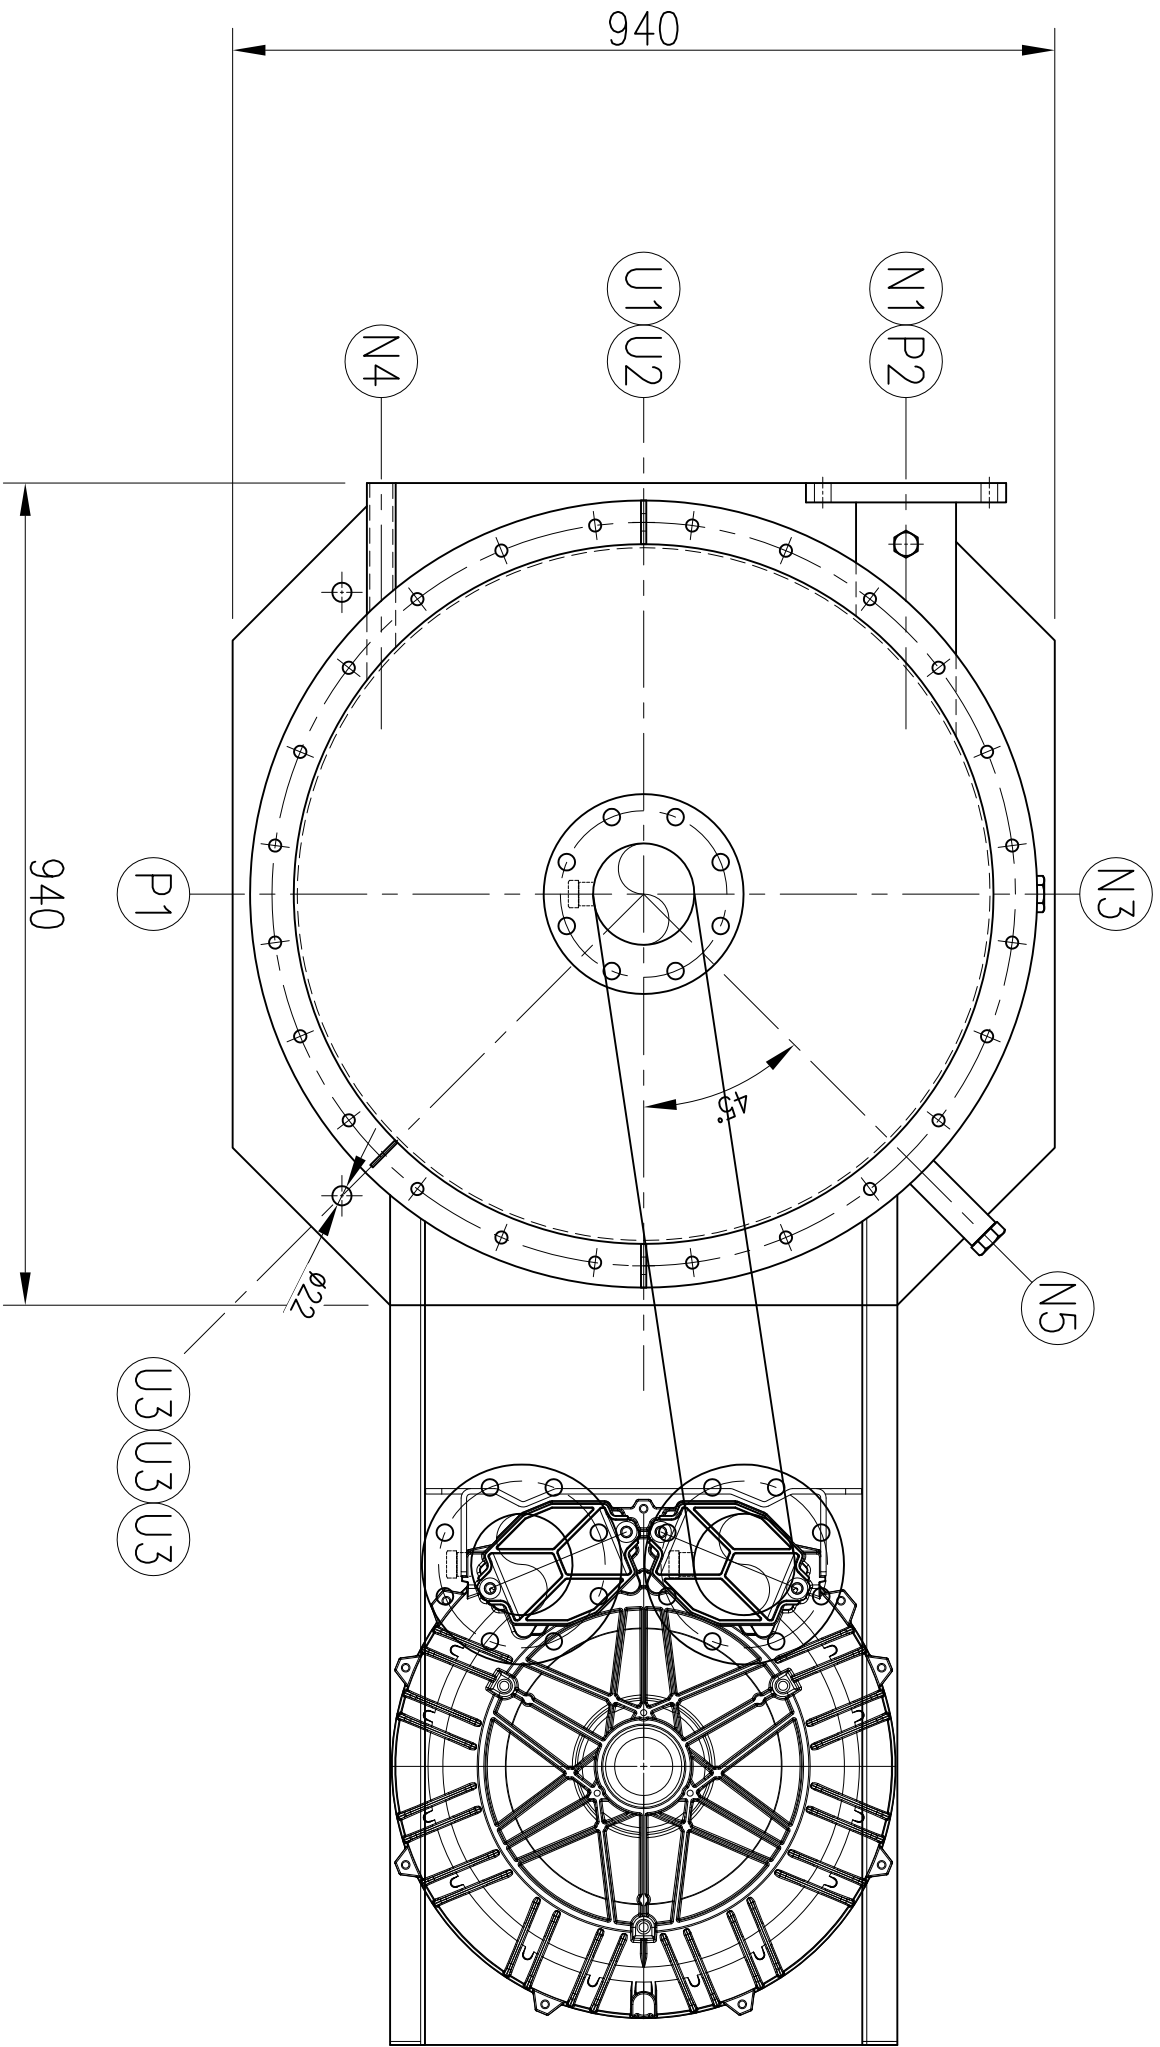

ORIENTATION PLAN
MIN. CLEARANCE FOR
INTERNAL FILTER REMOVAL
1650mm

DETAIL X
FASTENERS-GASKETS-GROUNDING

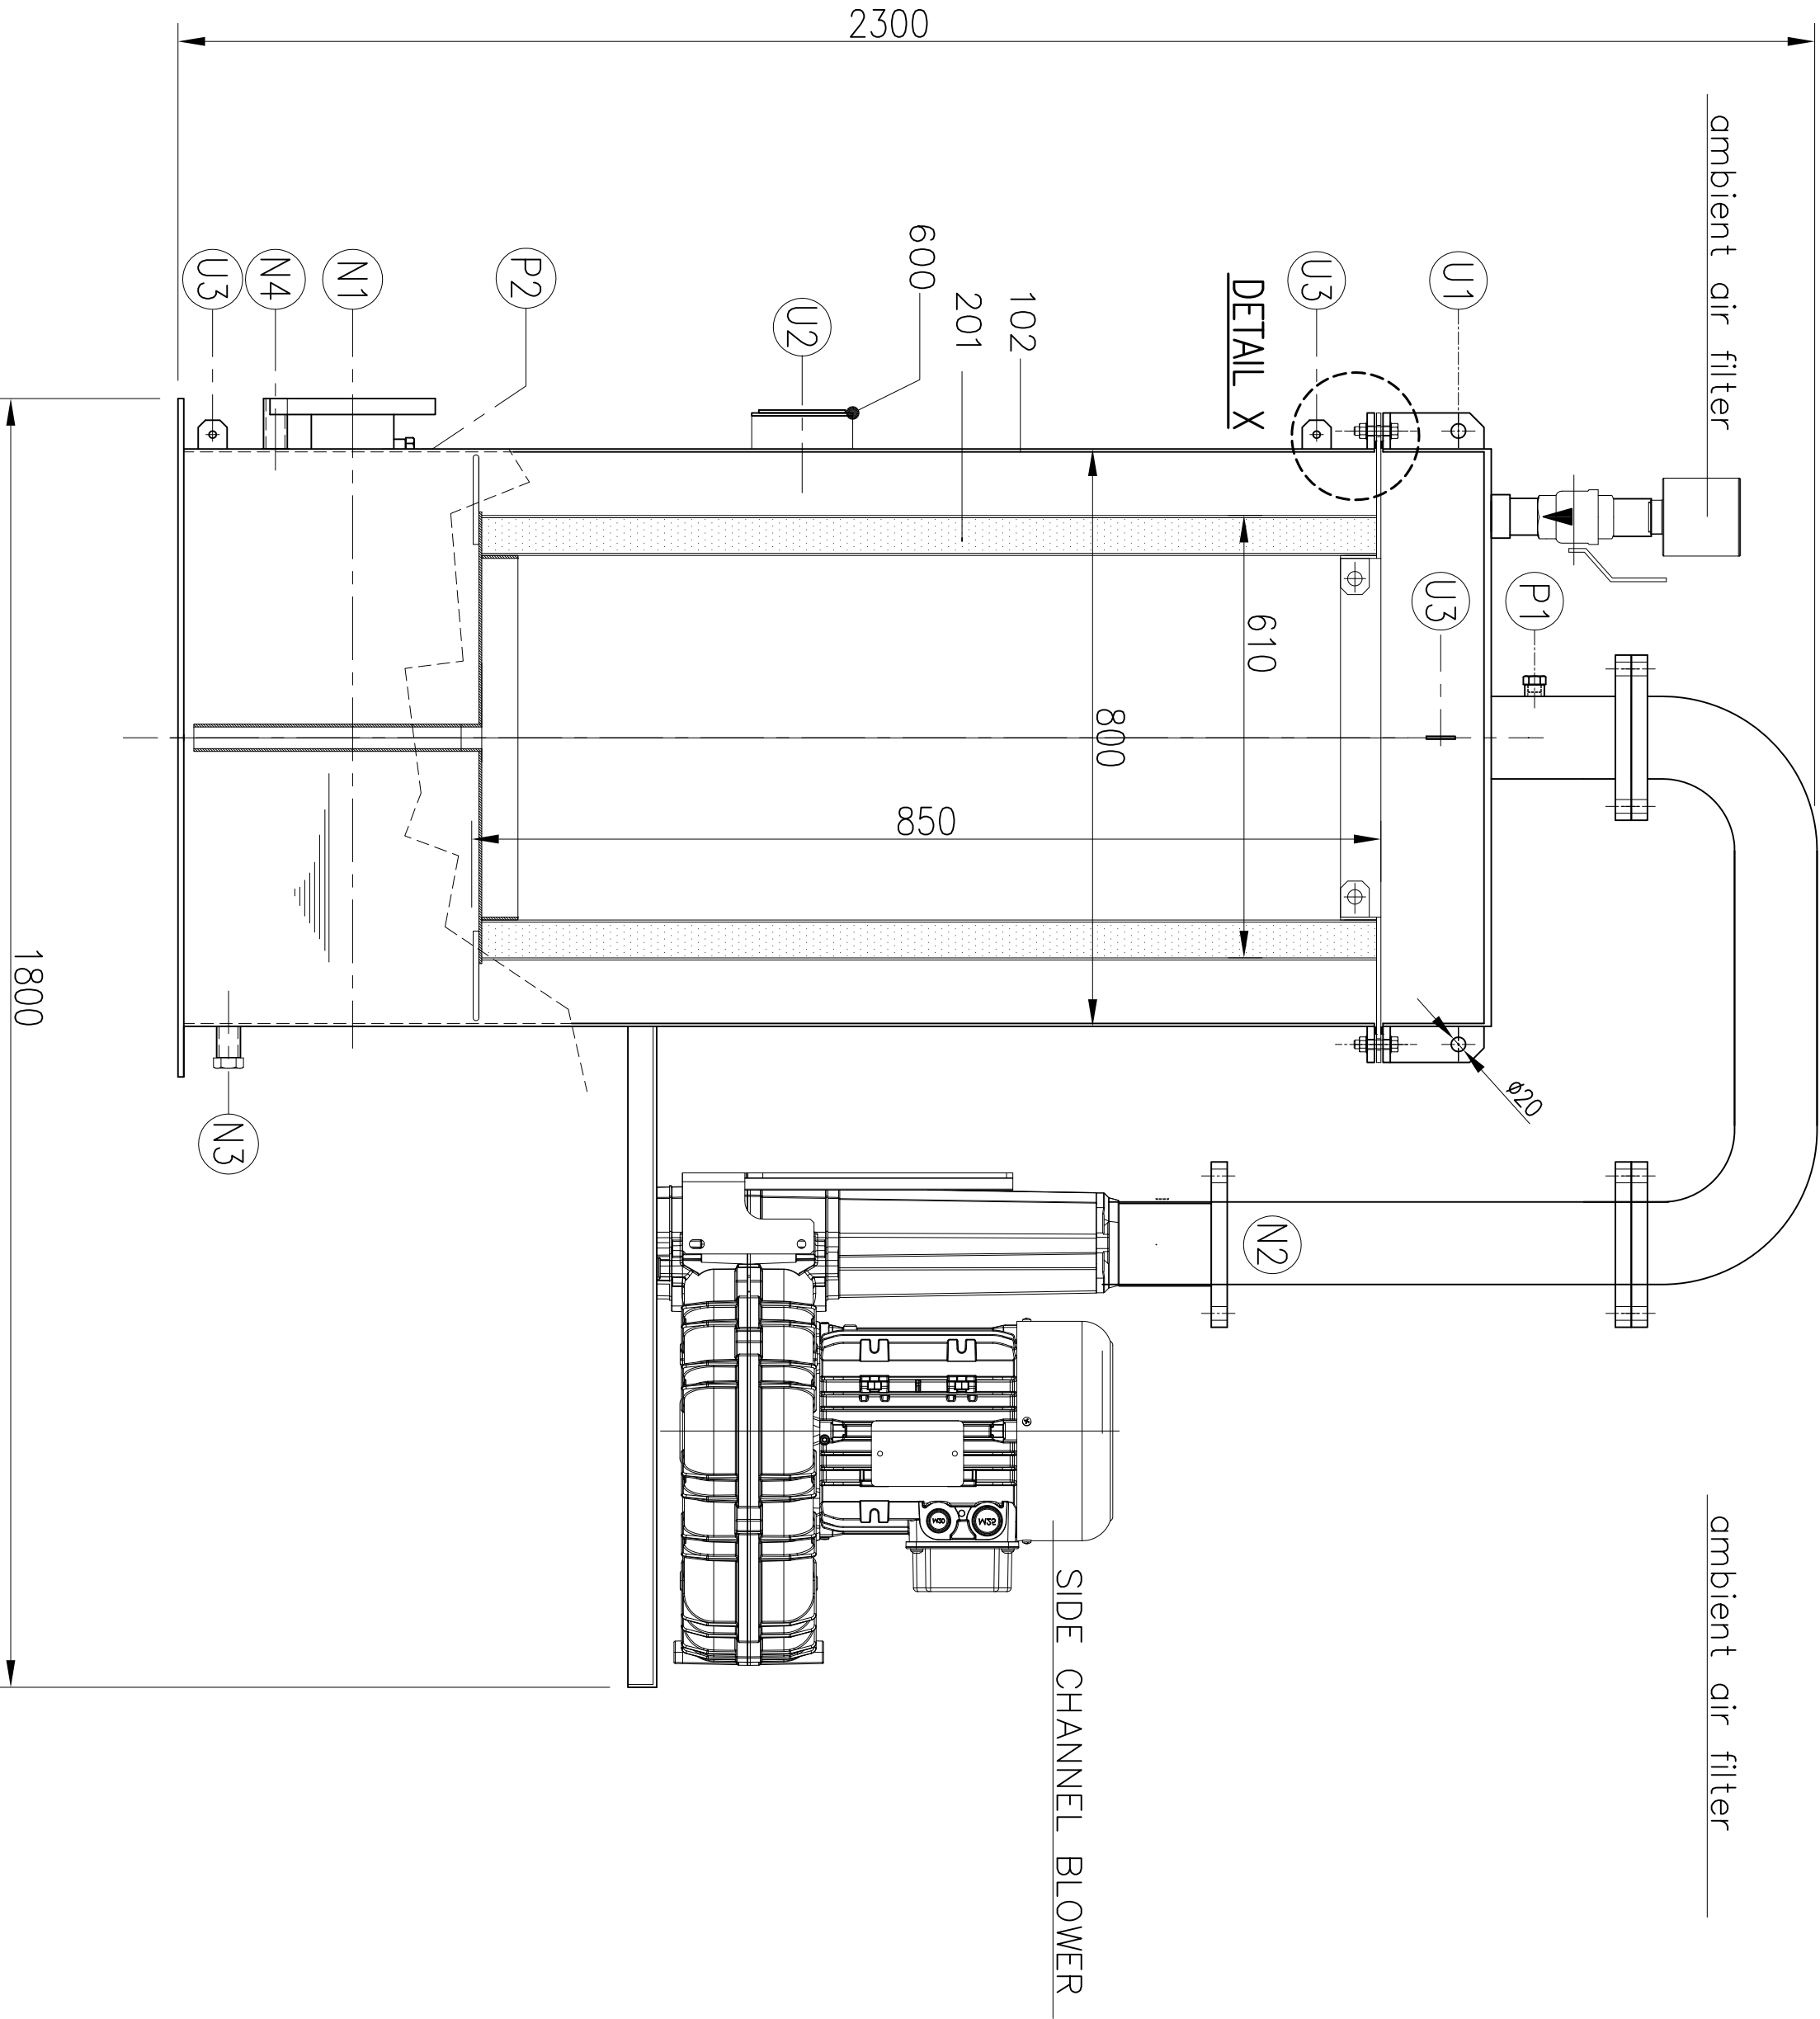

PART LIST					
Part No.	Description	Qty	Material	Dimension	Code/Remarks
102	VESSEL LOWER SECTION	1	C.S.		
102.1	VESSEL UPPER SECTION	1	C.S.		
201	FIBERWIND (APPROX 65 KG)	1	C.S.		BMSFF-600850
400	GASKET	6 mt	PTFE	10x3	
500	SCREW+NUT+DBL WASHER	24	C.S.	M12x50	
501	SCREW+NUT+DBL WASHER	3	AISI 316L	M8x30	
600	NAMEPLATE	1	ALUMINIUM	110x95x1	
601	GROUNDING COPPER BRAID	2	COPPER	16mm2x200MM	
-	SIDE CHANNEL BLOWER	1	ALUMINIUM		

NOZZLE LIST					
Pos	Service	Pcs	Material	Dimension	Rating
N1	INLET CONNECTION	1	C.S.	SO 4" ANSI150# RF	-
N2	OUTLET CONNECTION	1	C.S.	SO 4" ANSI150# RF	-
N3	MAINTENANCE DRAIN CONN.+PLUG	1	C.S.	H/COUPLING 1" NPTF	-
N4	OVERFLOW DRAIN CONNECTION	1	C.S.	H/COUPLING 1" NPTF	-
P1	PRESSURE TAPPING – PLUGGED	1	C.S.	H/COUPLING 1/2" NPTF	-
P2	PRESSURE TAPPING – PLUGGED	1	C.S.	H/COUPLING 1/2" NPTF	-
U1	LIFTING LUG	2	C.S.	Thk.8	-
U2	NAME PLATE SUPPORT	1	C.S.	Thk.2	-
U3	EARTHING LUG	3	C.S.	40x40x4 hole Ø10	-

DESIGN DATA		
DESIGN TEMPERATURE:	100°C	
DESIGN PRESSURE:	+0,49 barg	
NOTE		

00	15/03/21	ISSUED FOR INFO	AG	AG	AG
REV.	DATE	DESCRIPTION	DIS./DRAWN	CONTR./CHECK	APPR.
CUSTOMER / PLANT			REFERENCE:		
CUSTOMER:-			TOWER DIA :		
P.O.:-			VESSEL No :		
USER:			JOB :-		
PLANT SIDE:					
SERVICE: FIBREWIND MIST ELIMINATOR					

OIL MIST COALESCER

GENERAL ARRANGEMENT

SCALE/SCALE

F.T.O

COMMESSA/JOB

INDICAZIONE DOCUMENTO

W.B.S. SISTEMA

DISC. ATT. TRP

NUMERO

FOGLIO N°

REV.

UNITA

0101

CD S O O 2 0 0 1 0 0

measures in mm

1:10

A 2 - 1 - 3 1 3 6