William Hackett

WH L4 Adaptable Lever Hoist

Standards:
British Standard BS EN13157:2004 + AI:2009

Clevis top and bottom hooks: Adaptors fitted into hook housings allow clevis style end fittings such as Hack8 Self locking hook or Clevis shackle.

Bespoke adaptors: Allow 360 degree rotation and 180 degree pivot. This improved functionality helps hook engagement.

Light load capability: the WH L4 is tested and certified at 2% of the lever hoist rated capacity.

Twin pawl: double safety; fitted as standard.

Hook housing: secured with socket head cap screws/hex head bolts and nyloc locking nuts to allow full inspection.

Fleeting/Cross hauling: the WH L4 lever hoists are tested and certified for fleeting or cross hauling applications up to 45° from the vertical without deration.

Load chain: the WH L4 lever hoists are fitted with load chain that fully complies with international standard BS EN818-7 Grade T (8).


Overload limiter: available as an option upon request.

Top and bottom hook adaptors: available as an option upon request.

Travelling end stop: available as an option upon request.

Manufactured and proof tested in the UK.



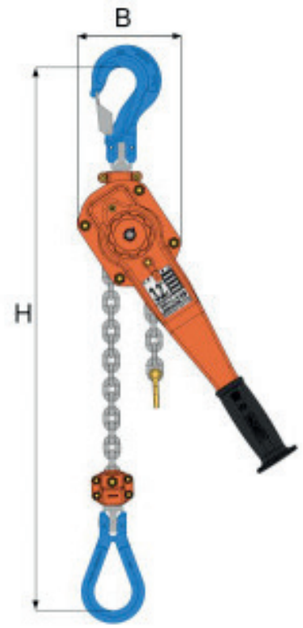



Metric Specifications

PART CODE	WLL tonnes	NO. OF FALLS	LOAD CHAIN mm	STD. LIFT m	A mm	B mm	H mm	MASS Kg
032.025.TB	0.25	1	3.2 x 9	1.5	90.0	150	200	1.6
032.050.TB	0.50	1	4.3 x 12	1.5	98.0	172	250	2.6
033.080.TB	0.80	1	5.6 x 17	1.5	148.0	121	280	6.2
033.160.TB	1.60	1	7.1 x 21	1.5	165.5	141	350	9.6
033.320.TB	3.20	1	10 x 30	1.5	194.5	178	420	15.5
033.630.TB	6.30	2	10 x 30	1.5	194.5	228	570	27.0
033/1000.TB	10.00	3	10 x 30	1.5	194.5	310	680	38.3

liftingsales@williamhackett.co.uk
www.williamhackett.co.uk
+44 (0)1665 604200

LEEA Full Member

William Hackett

WH L4 Adaptable Lever Hoist

Standards:
British Standard BS EN13157:2004 + AI:2009

Clevis top and bottom hooks: Adaptors fitted into hook housings allow clevis style end fittings such as Hack8 Self locking hook or Clevis shackle.

Bespoke adaptors: Allow 360 degree rotation and 180 degree pivot. This improved functionality helps hook engagement.

Light load capability: the WH L4 is tested and certified at 2% of the lever hoist rated capacity.

Twin pawl: double safety; fitted as standard.

Hook housing: secured with socket head cap screws/hex head bolts and nyloc locking nuts to allow full inspection.

Fleeting/Cross hauling: the WH L4 lever hoists are tested and certified for fleeting or cross hauling applications up to 45° from the vertical without deration.

Load chain: the WH L4 lever hoists are fitted with load chain that fully complies with international standard BS EN818-7 Grade T (8).


Overload limiter: available as an option upon request.

Top and bottom hook adaptors: available as an option upon request.

Travelling end stop: available as an option upon request.

Manufactured and proof tested in the UK.



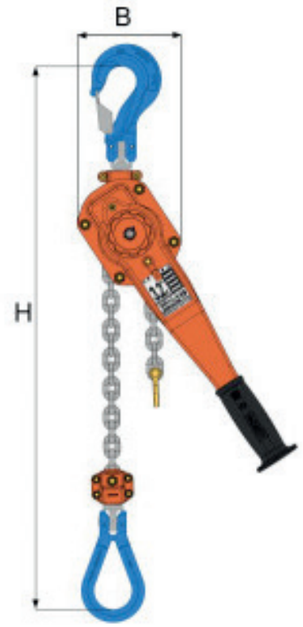



Imperial Specifications

PART CODE	WLL tons	NO. OF FALLS	LOAD CHAIN mm	STD. LIFT ft	A inch	B inch	H inch	MASS lbs
032.025.TB	0.25	1	3.2 x 9	1.5	3.54	5.91	7.87	3.53
032.050.TB	0.50	1	4.3 x 12	1.5	3.86	6.77	9.84	5.73
033.080.TB	0.80	1	5.6 x 17	1.5	5.83	4.76	11.02	13.67
033.160.TB	1.60	1	7.1 x 21	1.5	6.52	5.55	13.78	21.16
033.320.TB	3.20	1	10 x 30	1.5	7.66	7.01	16.54	34.17
033.630.TB	6.30	2	10 x 30	1.5	7.66	8.98	22.44	59.52
033/1000.TB	10.00	3	10 x 30	1.5	7.66	12.20	26.77	84.44

liftingsales@williamhackett.co.uk
www.williamhackett.co.uk
+44 (0)1665 604200

LEEA Full Member