

Key Features

LIGHT LOAD CAPABILITY: tested and certified at 2% of the chain hoist rated capacity.

QUAD PAWL (QP): Endurance tested to twice the industry norm.

SAFETY LATCHES: hooks are fitted with heavy duty cast steel latches. The latch and hook tip are integrated creating a strong and robust hook closure.

HOOK OVERLOAD AND TRACEABILITY MARKS: hooks have overload indicator marks either side of the hook throat (500kg to 10t). Both top and bottom hooks are embossed with a batch code, manufacturer's mark and the working load limit for full traceability and compliance to international standards.

HAND CHAIN JOINER: a unique hand chain joiner is used as a quick and secure method of joining the hand chain.


HOOK HOUSING: secured with socket head cap screws/hex head bolts and nyloc insert locking nuts to allow full inspection.

FLEETING/CROSS HAULING: independently tested (test report 2550-7615) for fleeting or cross hauling applications. Certified to angles up to 60° from the vertical without deration of the WLL.

LOAD CHAIN: fitted with load chain that fully complies with international standard BS EN818-7 Grade T (8).


MANUFACTURED AND PROOF TESTED in the U.K.



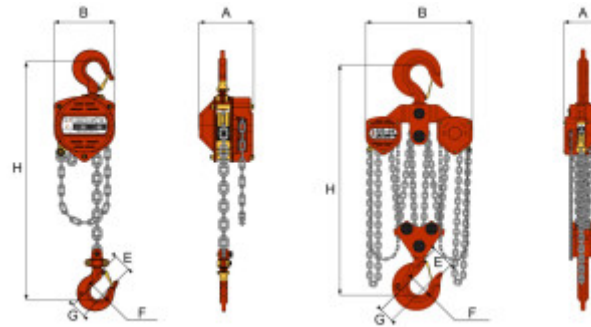

Metric

Part Code	WLL tonnes	No. of Falls	Load Chain mm	Hand Chain mm	Standard lift m	A mm	B mm	E mm	F mm	G mm	H mm	Mass kg 3m HOL	Extra Weight per m kg
025.053	0.50	1	6 x 18	5 x 25	3	134	155	49.0	40	25.5	350	11.1	1.7
025.103	1.00	1	6 x 18	5 x 25	3	134	155	49.0	40	25.5	350	11.1	1.7
025.163	1.60	1	8 x 24	5 x 25	3	151	173	51.5	40	30.0	390	16.8	2.2
025.203	2.00	1	8 x 24	5 x 25	3	157	185	54.5	44	30.0	410	16.8	2.2
025.323	3.20	2	8 x 24	5 x 25	3	157	235	61.0	48	37.5	495	24.2	3.6
025.503	5.00	2	10 x 30	5 x 25	3	180	262	85.0	60	43.0	635	38.4	5.2
025.753	7.50	3	10 x 30	5 x 25	3	180	373	89.0	83	53.0	775	58.2	7.6
025/1003	10.00	4	10 x 30	5 x 25	3	180	365	89.0	83	53.0	815	68.9	9.5
025/1503	15.00	6	10 x 30	5 x 25	3	210	406	-	108	80.0	1000	116.7	13.9
025/2003	20.00	8	10 x 30	5 x 25	3	225	550	-	108	80.0	1100	149.5	19.0
025/3003	30.00	12	10 x 30	5 x 25	3	460	800	-	140	112.0*	1550	515.0	27.7
025/5003	50.00	20	10 x 30	5 x 25	3	580	840	-	180	140.0*	2000	750.0	45.8

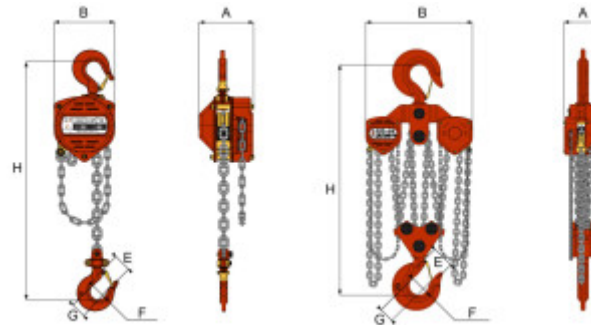

Imperial

Part Code	WLL tons	No. of Falls	Load Chain mm	Hand Chain mm	Standard lift ft	A in	B in	E in	F in	G in	H in	Mass lbs 10ft HOL	Extra Weight per 3ft lbs
025.053	0.5	1	6 x 18	5 x 25	10	5.28	6.10	1.93	1.57	1.00	13.78	24.5	3.8
025.103	1.0	1	6 x 18	5 x 25	10	5.28	6.10	1.93	1.57	1.00	13.78	24.5	3.8
025.163	1.6	1	8 x 24	5 x 25	10	5.94	6.81	2.03	1.57	1.18	15.35	37.0	4.9
025.203	2.0	1	8 x 24	5 x 25	10	6.18	7.28	2.15	1.73	1.18	16.14	37.0	4.9
025.323	3.2	2	8 x 24	5 x 25	10	6.18	9.25	2.40	1.89	1.48	19.49	53.4	7.9
025.503	5.0	2	10 x 30	5 x 25	10	7.09	10.32	3.35	2.36	1.69	25.00	84.7	11.5
025.753	7.5	3	10 x 30	5 x 25	10	7.09	14.69	3.50	3.27	2.09	30.51	128.3	16.8
025/1003	10.0	4	10 x 30	5 x 25	10	7.09	14.37	3.50	3.27	2.09	32.09	151.9	20.9
025/1503	15.0	6	10 x 30	5 x 25	10	8.27	15.98	-	4.25	3.15	39.37	257.3	30.6
025/2003	20.0	8	10 x 30	5 x 25	10	8.86	21.65	-	4.25	3.15	43.31	329.6	41.9
025/3003	30.0	12	10 x 30	5 x 25	10	18.11	31.50	-	5.51	4.41*	61.02	1135.4	61.1
025/5003	50.0	20	10 x 30	5 x 25	10	22.83	33.07	-	7.09	5.51*	78.74	1653.5	101.0