William Hackett

WH L4 Compact Lever Hoist

Standards:
The WH L4 compact lever hoist is verified by DNV as compliant with the requirements of the relevant international standards. (Verification no. N141UH09)
British Standard BS EN13157:2004 + AI:2009
American Standard ASME B30.16-2014
Australian Standard AS1418.2-1997
South African Standard SANS 1594:2007
NORSOK R-002: 2017.

Light load capability: tested and certified at 5% of the chain hoist rated capacity.

Twin pawl: fitted as standard.

Safety factor: 4:1.

Safety latches: hooks are fitted with heavy duty cast steel latches. The latch and hook tips are integrated creating a strong and robust hook closure.

Hook overload and traceability marks: hooks have overload indicator marks either side of the hook throat. Both top and bottom hooks are embossed with a batch code, manufacturer's mark and the working load limit.

Load chain: fitted with load chain that fully complies with international standard BS EN818-7 Grade T (8).


Temperature range:
-20°C to +120°C.


Proof Tested: 100% of hoists are proof tested to 1.5 times the WLL.

Manufactured and proof tested in the UK.





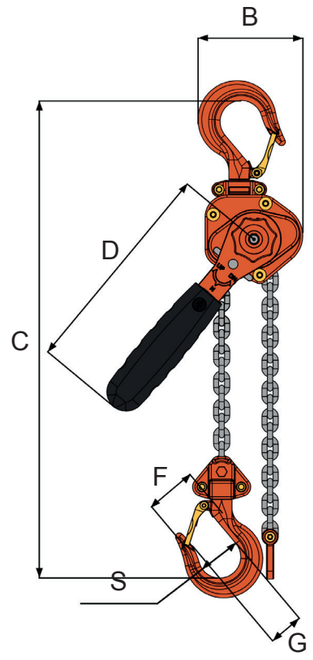

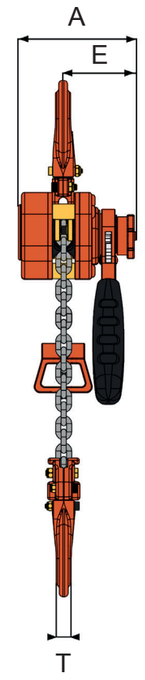

Metric Specifications

PART CODE	WLL tonnes	NO. OF FALLS	LOAD CHAIN mm	STANDARD LIFT m	A mm	B mm	C mm	D mm	E mm	F mm	G mm	S mm	T mm	MASS kg
032.025	0.25	1	3.2 x 9	1.5	90	68	200	150	56	35.5	20	32.0	11.0	1.6
032.050	0.50	1	4.3 x 12	1.5	98	81	250	172	62	42.0	21	34.5	12.5	2.6

liftingsales@williamhackett.co.uk
www.williamhackett.co.uk
+44 (0)1665 604200

LEEA Full Member

William Hackett

WH L4 Compact Lever Hoist

Standards:
British Standard BS EN13157:2004 + AI:2009
American Standard ASME B30.16-2014
Australian Standard AS1418.2-1997
South African Standard SANS 1594:2007
NORSOK R-002: 2017.

Light load capability: tested and certified at 5% of the chain hoist rated capacity.

Twin pawl: fitted as standard.

Safety factor: 4:1.

Safety latches: hooks are fitted with heavy duty cast steel latches. The latch and hook tips are integrated creating a strong and robust hook closure.

Hook overload and traceability marks: hooks have overload indicator marks either side of the hook throat. Both top and bottom hooks are embossed with a batch code, manufacturer's mark and the working load limit.

Load chain: fitted with load chain that fully complies with international standard BS EN818-7 Grade T (8).


Temperature range:
-20°C to +120°C.


Proof Tested: 100% of hoists are proof tested to 1.5 times the WLL.

Manufactured and proof tested in the UK.





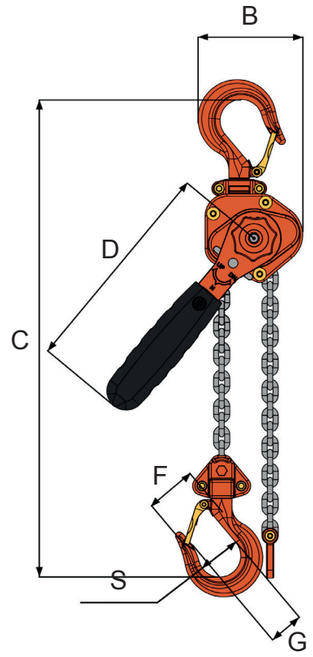

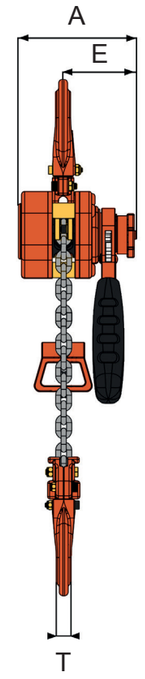

Imperial Specifications

PART CODE	WLL tons	NO. OF FALLS	LOAD CHAIN mm	STANDARD LIFT m	A inch	B inch	C inch	D inch	E inch	F inch	G inch	S inch	T inch	MASS lbs
032.025	0.25	1	3.2 x 9	1.5	3.54	2.68	7.87	5.91	2.20	1.40	0.79	1.26	0.43	3.5
032.050	0.50	1	4.3 x 12	1.5	3.86	3.19	9.84	6.77	2.44	1.65	0.83	1.36	0.49	5.7

liftingsales@williamhackett.co.uk
www.williamhackett.co.uk
+44 (0)1665 604200

LEEA Full Member